

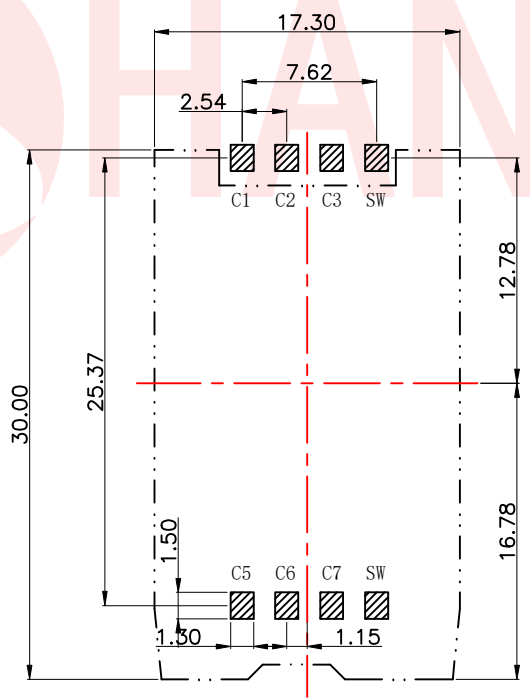
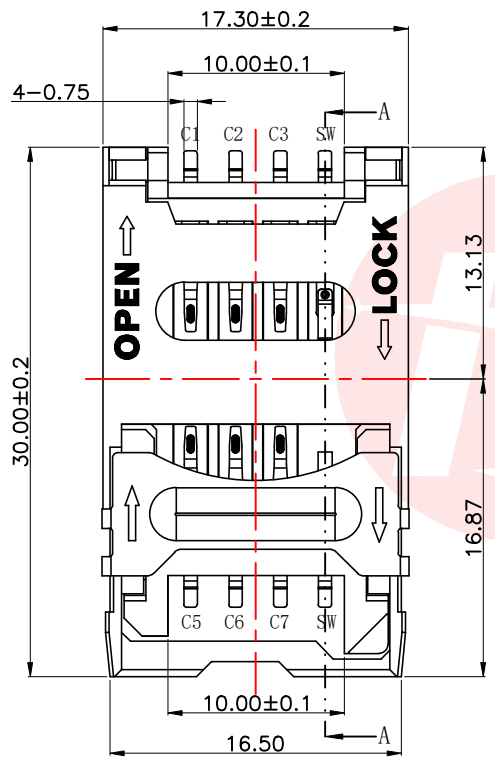
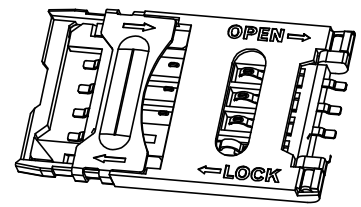


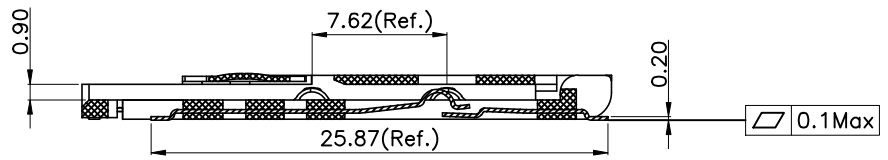


REV.	ECN NO OR DESCRIPTION	REVISED	DATE

SECTION A-A

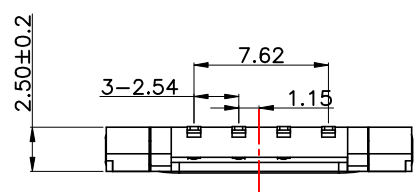

RECOMMENDED P. C. B LAYOUT
COMPONENT SIDE (TOLERANCE ±0.05)

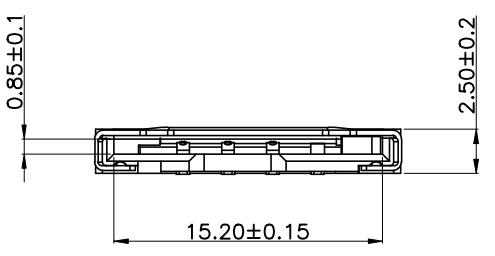

Specification 规格:

Material 物料规格:

Housing 塑胶主体: LCP UL94V-0
Contact Terminal 接触端子: Phosphor Bronze
Metallic Shell 金属外壳: Stainless Steel-SUS304

Plating 电镀规格:

Contact Terminal Plating 接触端子部分电镀
Contact Area: 5μ" Gold
Soldering Area: 100μ" Tin
Under-plating: 50μ" Nickel above

Electrical 电气规格:

Voltage Rating 电压额定值: 50 V max
Current Rating 电流额定值: 1A max
Operating Temperature 工作温度: -40°C to +85°C
Contact Resistance 接触电阻值: 50 mΩ typical, 100mΩ max
Insulating Resistance 绝缘电阻值: 1000 MΩ min. (Apply 施加 500V DC)
Dielectric Withstanding Voltage 耐电压: 500 VAC for 1 minute

Mechanical 机械性规格:

Durability 耐久性: min 5,000 cycles

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:	ANGLES:	TITLE SIM CARD 翻盖式H=2.5带开关带铁盖			
X :±0.30	X :±2°	DWN	xiong	PART NO. SIM-026-P8	
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE: 1:1	UNIT: mm
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET: 10F 1
		REV: A4			
CUSTOMER COPY					